


Product

DATA

Data sheet No. DS0303740
EN 2013 • R2-7

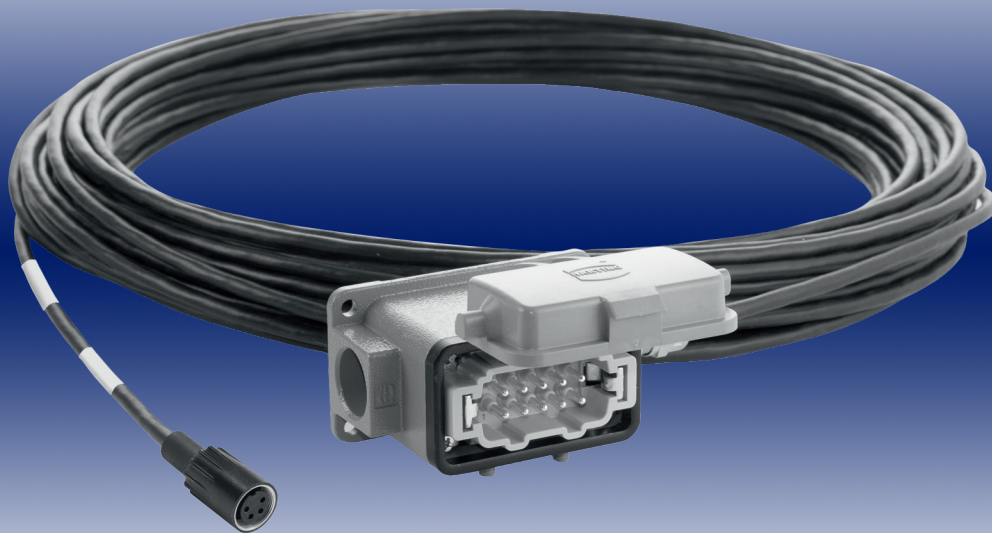

Cable trailer 25 m4F h10M mount



Article No. 0303740




Technical Specifications


Cable trailer 25 m4F h10M mount

Article number	0303740
Length	25m.
Cable	Art. No. 1220110, Multi cable 1 x coax + 2 x power, 1 x data.
Connectors	10 pins male connector with protection cap, grey, and 4pins female molded connector.
Mounting hardware	Rubber isolation, 4 x head cap screws M5 x 35, 8 x spring washers B5, 4 x hex nuts M5.
Operating temperature	-40°C ... +85°C
Weight	1,98kg.
Protection	IP 67 according to IEC 60529 & vibration proof.
Kit assembly	To complete the Kit use articles 0304020 and 0303630 .

Installation

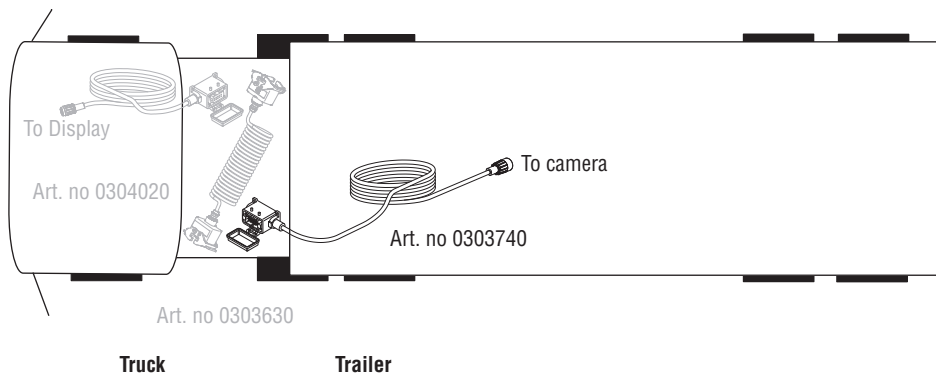


Connectors




Front side
Molded female
connector

- | | |
|-----------------|----------------|
| 1 = Coax core | = video signal |
| 2 = Coax screen | = video GND |
| 3 = Red | = 12V/DC |
| 4 = Black | = 0V |
| 5 - 9 = | = N.C. |
| 10 | = Shield |



pin layout
10p male connector

Dimensions

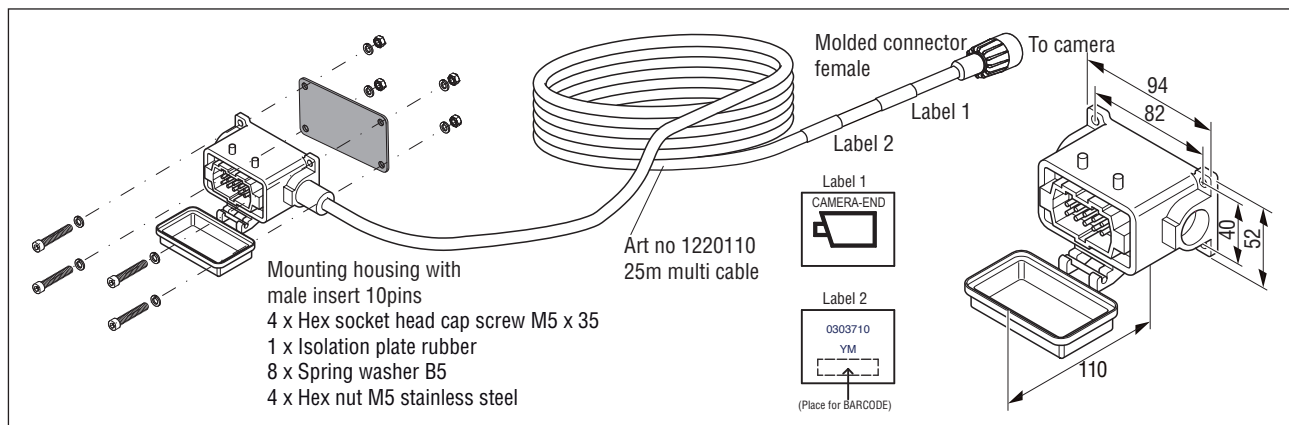

All data subject to change without notice. All dimensions are for commercial purpose only. The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations. All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives.



www.oralco.com