


Specification sheet

Twin XL dual-line automatic lubrication system

Dimensions

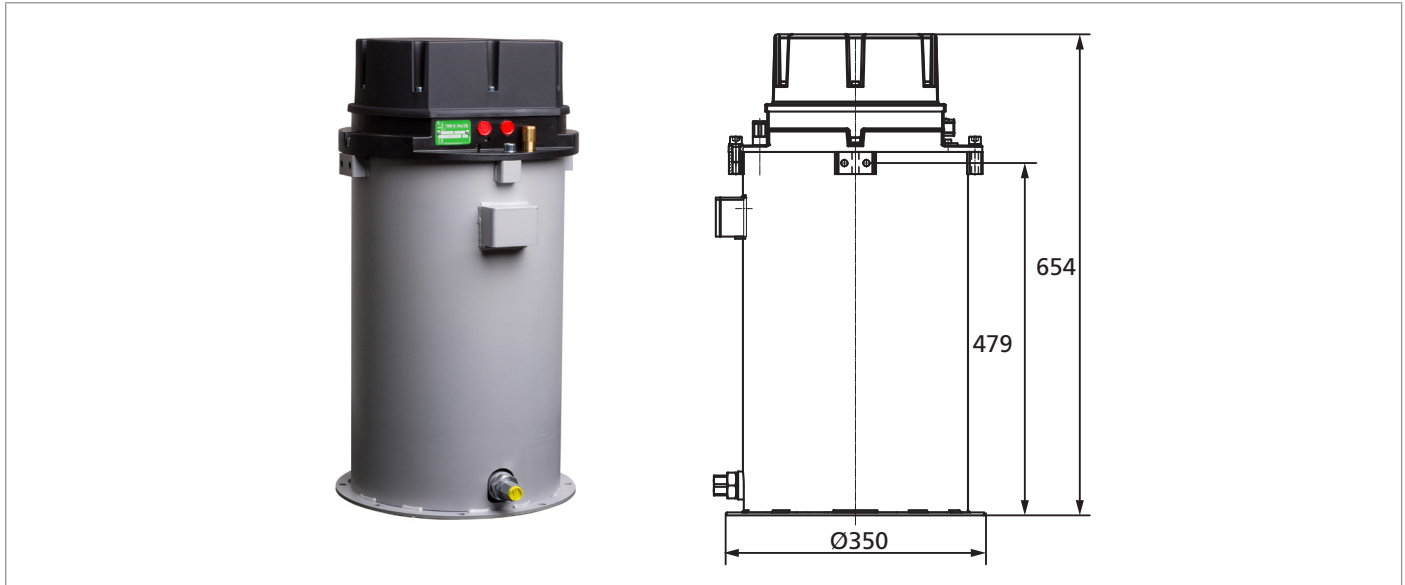

Version

Article code	Capacity reservoir	Supply voltage	Grease delivery	Max. operating pressure
F126630	18 litre	24 Vdc	20 cc/min	250 bar

Basic information

Pump type	Electric piston pump (5 pistons)
Operating principle	Parallel (dual-line)
Output	1
Max. number of lubrication points	200*
Cartridge or refillable	Refillable
Grease class up to	NLGI-2
Temperature range	- 20 °C up to + 70 °C
Controlled by	Timer
Interval	Variable
Supply voltage	24 Vdc
Rating pump motor	4 A at 20 °C / 15 A at -20 °C
Rating pump motor nominal	Pump engine: 36 W / solenoid valve 30 W
Connection type	8-pin TYCO
Valve type	Double solenoid valve 5/2-valve
Weight (excl. grease)	23 kg
Protection class	IP67 (pump unit)

* Depending on system resistance, grease delivery and tubing length.

